



Datenblatt - Fiche technique - Data sheet

12.03.2005



ROLINE 25pol. Stecker-Stecker




Connecteur mâle / mâle 25 pôles

ROLINE Mini Gender Changer, 25-pin M - M

11-21-97 00:06 P. 003

NO. 250

15:34

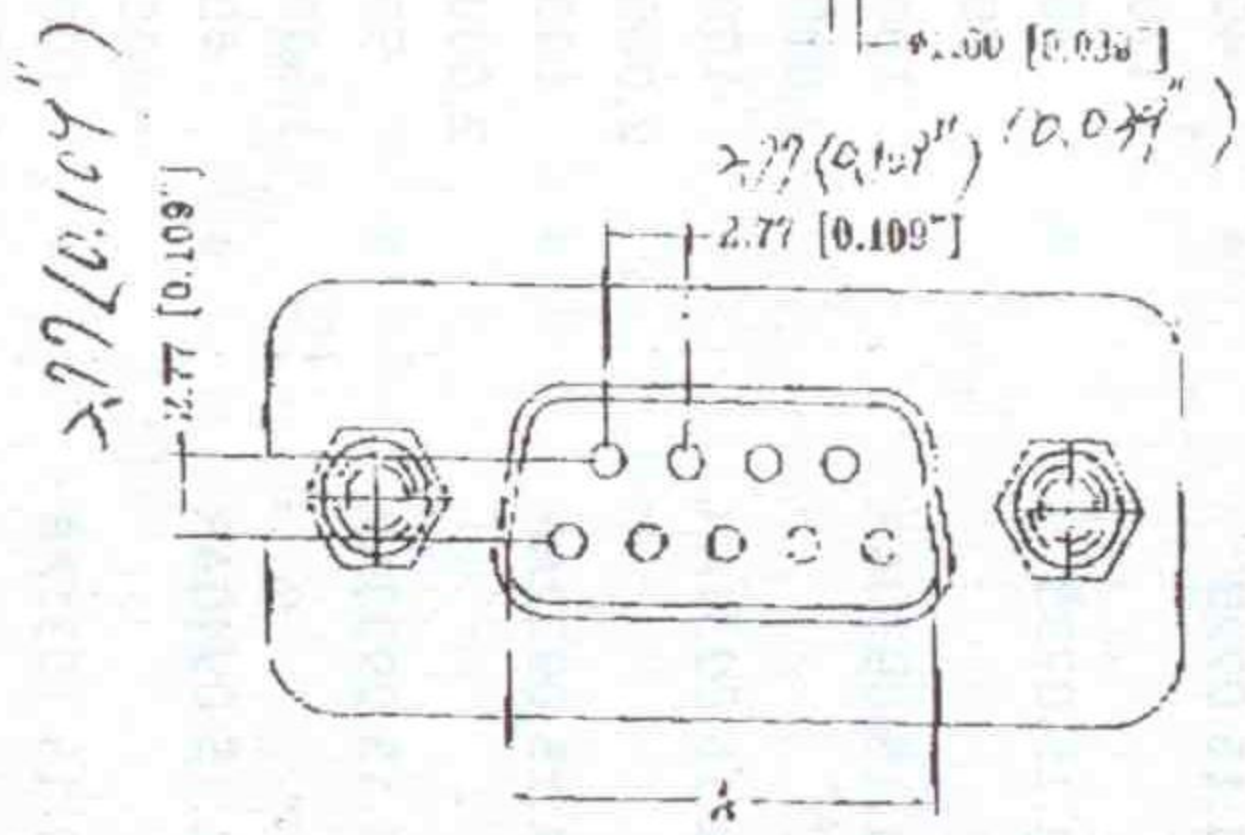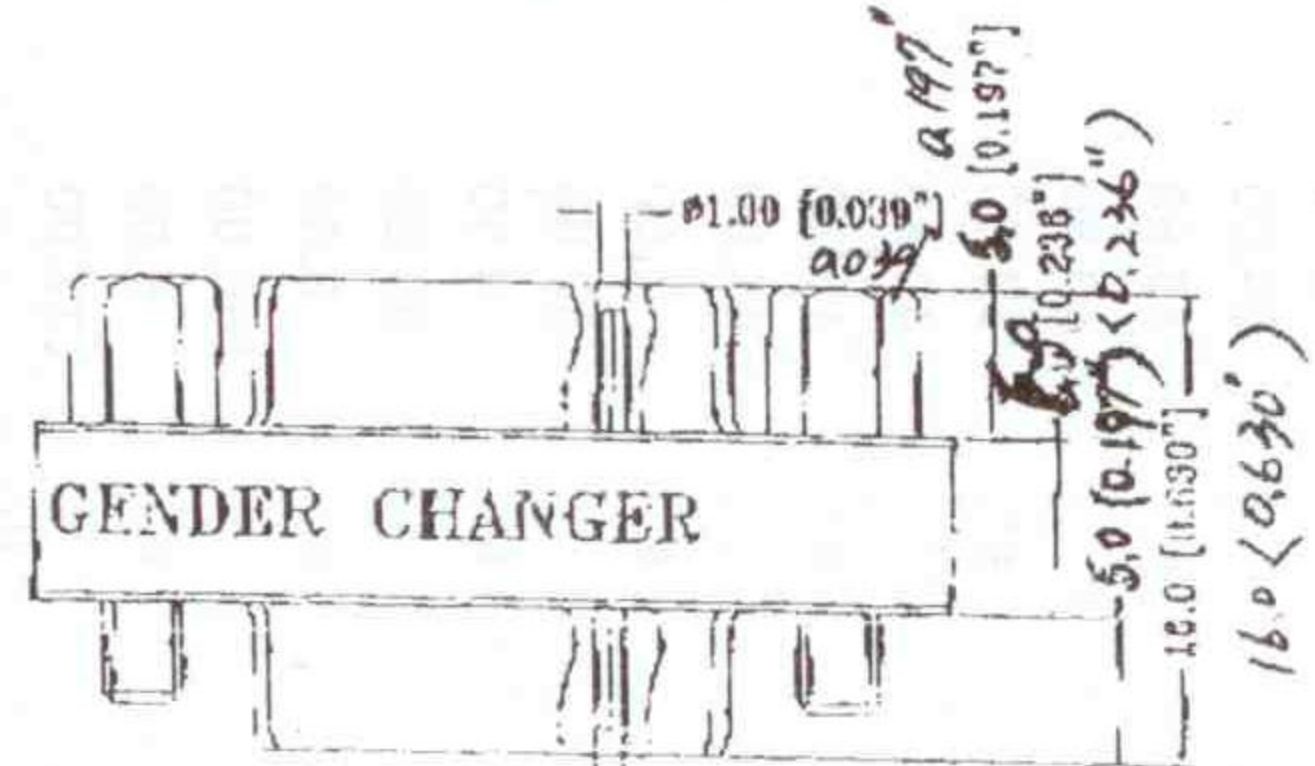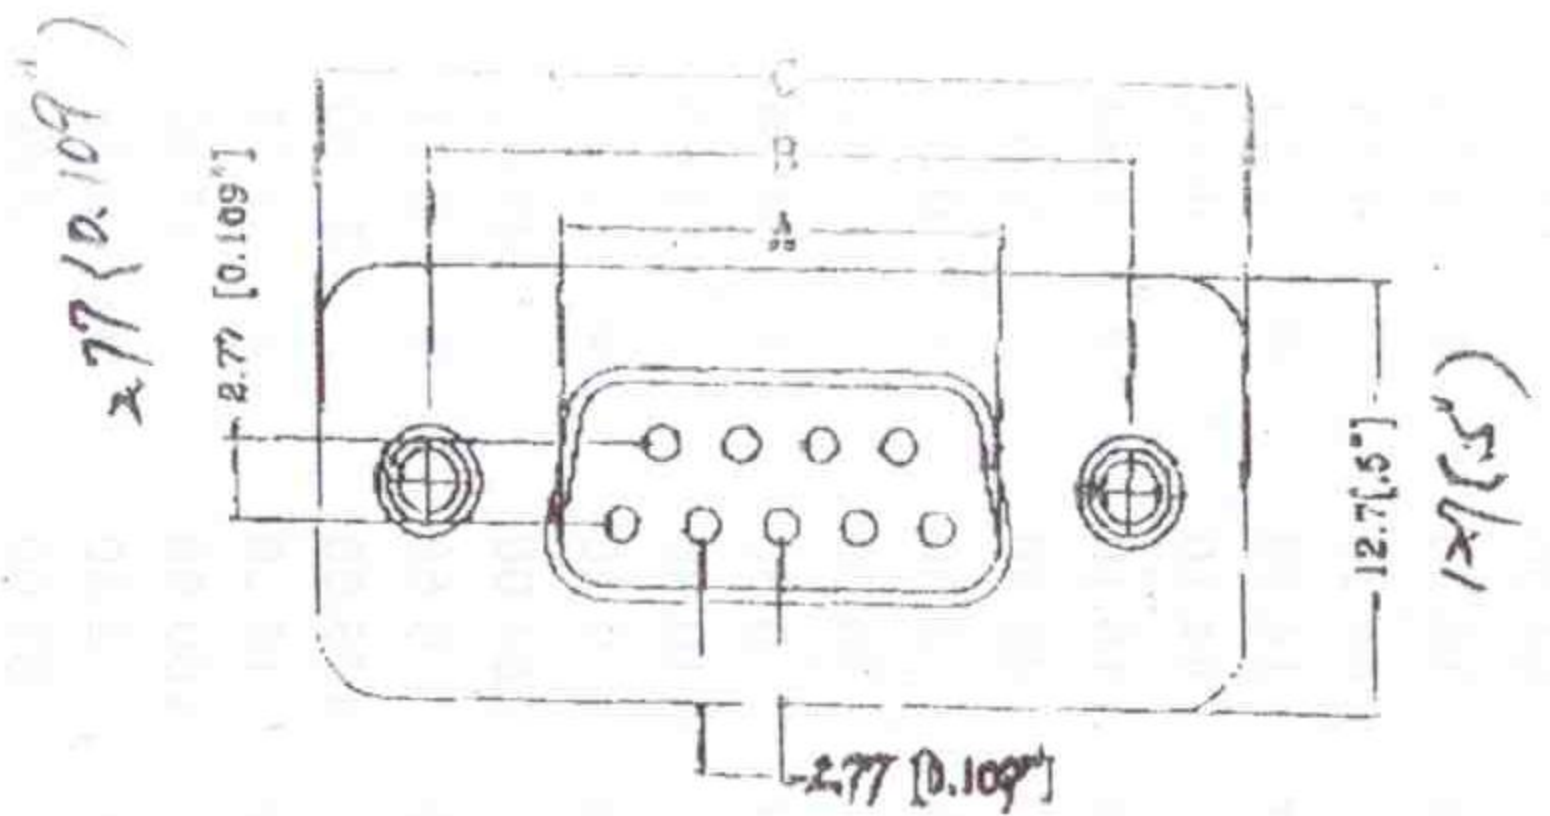

SPECIFICATION:

1. VOLTAGE RATING: 300VAC(rms).
2. CURRENT RATION: 5 AMPERES.
3. DIELECTRIC STRENGTH: 1000VDC.
4. CONTACT RESISTANCE: 30mΩ max
5. INSULATION RESISTANCE: 5000mΩ min
6. DURABILITY: 30 CYCLES FOR GOLD FLUSH
150 CYCLES FOR 15u" GOLD PLATED
7. CORROSION RESISATANCE: MEET MIL-STD-202F METHOD
101 CONDITION SALT WATER
SPRAY FOR GOLD PLATED OVER 15u"
8. MATING FORCE: PER CONTACT 1 OZ - 16 OZ
UNMATING FORCE: 1 KG MIN.

REV.	ECN No.

DBM-M

MATERIAL:

- INSULATOR: F.B.T UL94V-0
- CONTACTS: BRASS, GOLD PLASH OVER NICKLE.
- SHELL: STEEL
- SHELL: BRASS, NICKLE OVER ALL.

PART NO.	Circuits	A	B	C
9-P	9	16.9 16.9	25.5 25.0	31.2 31.2
15-P	15	25.3 25.3	33.3 33.3	38.3 38.3
25-P	25	30.0 39.0	47.0 47.0	53.3 53.3
37-P	37	55.4 55.4	63.5 63.5	69.5 69.5

Rotronic Co., Ltd.

Title: GC DM/DM	
TOLERANCE UNLESS OTHERWISE SPECIFIED	Units: mm / inch
Sheet: 1 / 1	Ang: 0.0 = ±
mm: 0 = ±0.30	inch: 000 = ±
.00 = ±0.15	.0000 = ±
.000 = ±	0.00 = ±

REV	DRAWN BY	CHECKED BY	APPROVED BY	VIEW	DRAWING NO
1	C.C.S	TED JU	TED JU		
	07212001	07212001	07212001		