



Datenblatt - Fiche technique - Data sheet

12.03.3205




ROLINE Typ C - DVI Adapter, ST/BU

ROLINE Adaptateur Type C - DVI, M/F

ROLINE Type C - DVI Adapter, M/F

Item no.: 12.03.3205

ROLINE USB 3.1 Cable Adapter, C – DVI (24+5), M/F
Aluminum, silver

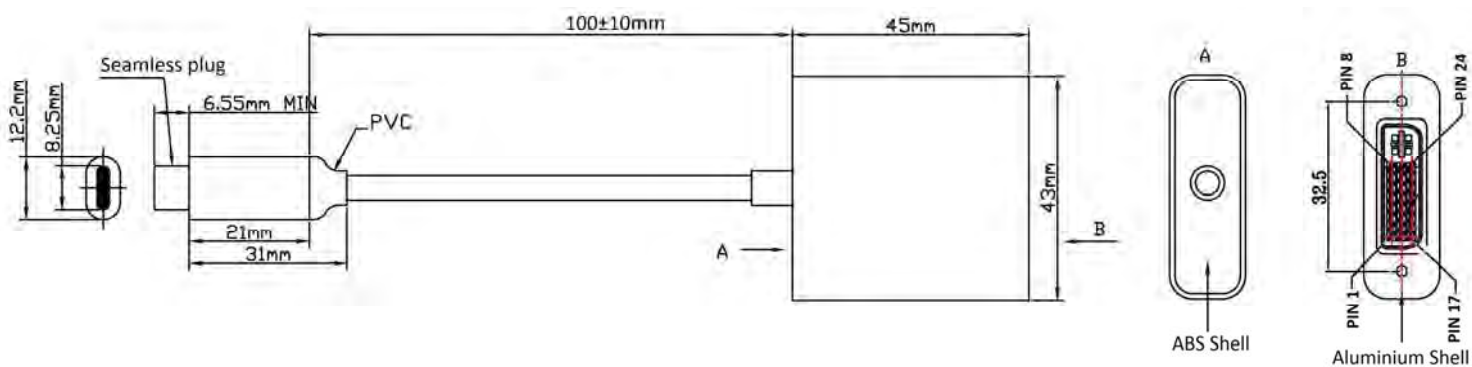

Features:

- Support DVI (24+5) Video output 1920*1080@60 Hz resolution
- Aluminum Housing in silver color
- No driver needed
- USB 3.1 Type-C interface supports plug and play, hot swap
- Easy to carry and use
- With 10cm Cable in white color
- Connector: USB 3.1 Type-C Male*1 (input) + DVI(24+5) Female*1 (output)
- Operating Temperature: 0°C~45°C
- Storage Temperature: -20°C~ 70°C
- Operating Humidity: 10% ~ 85 % RH (no condensation)
- System requirements: Windows, MAC OS X, Google Chrome

USB 3.1 Type-C™ to DVI 24+5

Socket Converter

User Manual



Contents

1.0 INTRODUCTION.....	1
2.0 FEATURES	1
3.0 SPECIFICATIONS	1
4.0 PACKAGE CONTENTS.....	2
5.0 OPERATION	2
6.0 CONNECTION DIAGRAM	2

USB 3.1 Type-C™ to DVI 24+5 Socket converter

DEAR CUSTOMER

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or using this product. Please keep this manual for future reference.

1.0 INTRODUCTION

This is a USB 3.1 Type C™ to DVI24+5 Socket, designed for connecting DVI Monitor to host computer, the host computer can easily connect to the DVI Monitor. Connecting the monitor with a DVI cable which is contacted with DVI socket of this converter It can work on Macbook or Google new Chromebook Pixel or Asus Zen AiO and other USB 3.1 Type C™ supported devices.

2.0 FEATURES

- Support USB 3.1 Type C™ Video output 1920*1080@60hz resolution
- NO driver needed
- ABS Housing
- With 10cm Cable
- USB 3.1 Type C™ interfaces support plug and play, hot swap
- Easy to carry and use

3.0 SPECIFICATIONS

Item No.:	
ABS Housing	716107 716107S
Aluminium Housing	716107V 716107D 716107X
Size(L*W*H)	200*48*14mm
Input/Output Connector	
Input port	USB 3.1 Type C™ Male*1
Output port	DVI24+5 Socket
Warranty	
Limited Warranty	1 Year
Environmental	
Operating Temperature	0℃~45℃
Operating Humidity	10% ~ 85 % RH (no condensation)
Storage Temperature	-20℃~ 70℃

Storage Humidity	5% ~ 90 % RH (no condensation)
System requirements	Windows, MAC OSX, Google Chrome
Regulatory Approvals	
	FCC CE Certification
	RoHS 2.0 & REACH Compliant
Accessories Adapter	
User Manual	English Version

4.0 PACKAGE CONTENTS

Before attempting to use this unit, please check the packaging and make sure the following items are contained in the shipping carton:

- Main unit x1
- User Manual x1

5.0 OPERATION

- 1) Connect the DVI 24+5 Socket to DVI Monitor
- 2) Connect the USB 3.1 Type C™ male port of this product to computer

6.0 CONNECTION DIAGRAM

