



Datenblatt - Fiche technique - Data sheet

12.03.3220




ROLINE Typ C - DisplayPort Adapter, v1.2, ST/BU

ROLINE Adaptateur Type C - DisplayPort, v1.2, M/F

ROLINE Type C - DisplayPort Adapter, v1.2, M/F

Item no.: 12.03.3220

ROLINE USB 3.1 Cable Adapter, C – DisplayPort, M/F
Aluminum, silver

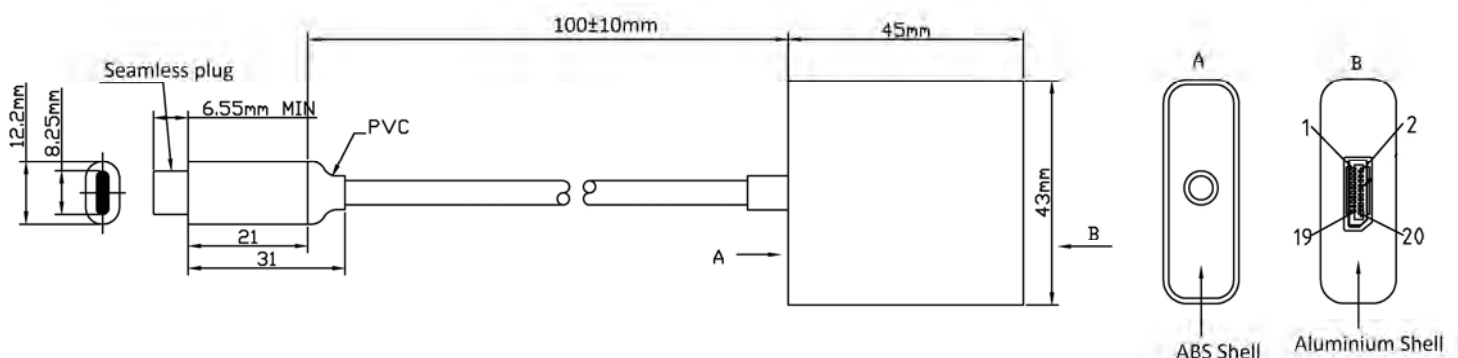

Features:

- Support DisplayPort Video output 4K*2K@60Hz resolution
- Aluminum Housing in silver color
- No driver needed
- USB 3.1 Type-C interface supports plug and play, hot swap
- Easy to carry and use
- With 10cm Cable in white color
- Connector: USB 3.1 Type-C Male*1 (input) + DisplayPort 1.2v Female*1 (output)
- Operating Temperature: 0°C ~45°C
- Storage Temperature: -20°C ~ 70°C
- Operating Humidity: 10% ~ 85 % RH (no condensation)
- System requirements: Windows, MAC OS X, Google Chrome

USB 3.1 Type-C™ to Displayport 1.2v Socket Converter

User Manual



Contents

1.0 INTRODUCTION.....	1
2.0 FEATURES	1
3.0 SPECIFICATIONS	1
4.0 PACKAGE CONTENTS.....	2
5.0 OPERATION	2
6.0 CONNECTION DIAGRAM	2

USB 3.1 Type-C™ to Display port 1.2v Socket converter

DEAR CUSTOMER

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or using this product. Please keep this manual for future reference.

1.0 INTRODUCTION

This is a USB 3.1Type C™ to Display port 1.2v Socket, designed for connecting display port monitor to host computer, the host computer can easily connect to the Display port monitor .Connecting the monitor with a Display port cable which is contacted with Display socket of this converter It can work on Mac book or Google new Chromebook Pixel or Asus Zen AiO and other USB 3.1Type C™ supported devices.

2.0 FEATURES

- Support USB 3.1Type C™ Video output 4K*2K@60hz resolution
- NO driver needed
- ABS Housing Provide white, black two colors
- Aluminium Housing Provide gold, silver, grey space, three colors
- Slim Type ABS Housing Provide white, black two colors
- With 10cm Cable
- USB 3.1Type C™ interfaces support plug and play, hot swap
- Easy to carry and use

3.0 SPECIFICATIONS

Item No.:	
ABS Housing	716106 716106S
ABS Slim Type	716146 716146S
Aluminium Housing	716146V 716146D 716146X
Size(L*W*H)	
ABS Housing	200*45*15.2mm
ABS Slim Type housing	200*25*11.5mm
Aluminium Housing	200*23.4*11mm
Input / Output Connector	
Input port	USB 3.1Type C™ Male*1
Output port	Display port 1.2v Socket
Warranty	

Limited Warranty	1 Year
Environmental	
Operating Temperature	0°C ~ 45°C
Operating Humidity	10% ~ 85 % RH (no condensation)
Storage Temperature	-20°C ~ 70°C
Storage Humidity	5% ~ 90 % RH (no condensation)
System requirements	Windows, MAC OSX, Google Chrome
Regulatory Approvals	
	FCC CE Certification
	RoHS 2.0 & REACH Compliant
Accessories Adapter	
User Manual	English Version

4.0 PACKAGE CONTENTS

Before attempting to use this unit, please check the packaging and make sure the following items are contained in the shipping carton:

- Main unit x1
- User Manual x1

5.0 OPERATION

- 1) Connect the Display port 1.2v Socket to Monitor
- 2) Connect the USB 3.1Type C™ male port of this product to computer

6.0 CONNECTION DIAGRAM

