

# 2-Port USB DisplayPort Cable KVM Switch with Remote Port Selector

## CS22DP

- The CS22DP 2-Port USB DisplayPort Cable KVM Switch is a control unit that allows access to two computers from a single USB and DisplayPort console (keyboard, video and mouse) with audio. With the CS22DP, you can quickly and effortlessly switch between two DisplayPort computers using a convenient remote port selector pushbutton.


The CS22DP supports multiplatform operations allowing you to switch between two PC's running different operating systems. Moreover, the compact design allows for an efficient and tidy installation, providing an ideal space-saving solution to keep your desk well-organized.

It's fast and easy to set up the CS22DP. Simply plug the KVM cables into their respective ports on the CS22DP and on the computers. There is no need to install software or configure devices – just plug and play.



## Features

- One KVM console controls two USB DisplayPort computers
  - Superior video quality – up to 2560 x 1600 @ 60Hz
  - Computer selection via Remote Port Selector
  - OS Support: Windows, Mac and Linux
  - Supports microphone and speakers
  - The USB ports can be used for USB peripheral sharing\*
  - Supports USB hot-plugging
  - HDCP Compatible
  - Bus-powered
- \* The CS22DP may require an external power supply via a micro USB port

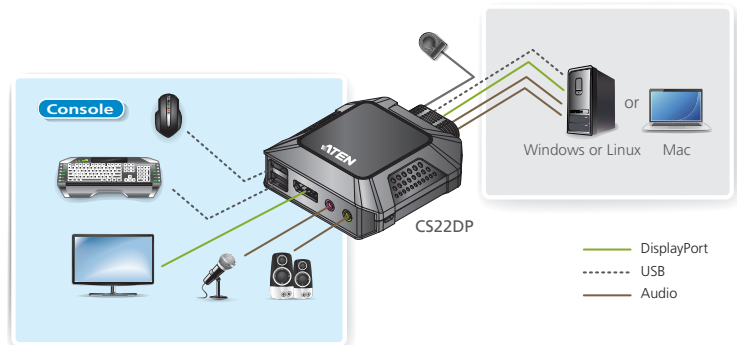

## Specifications

Function	CS22DP
<b>Computer Connections</b>	2
<b>Port Selection</b>	Remote Port Selector
<b>Connectors</b>	
Console Ports	1 x Micro USB Type B Female 2 x USB Type A Female 1 x DisplayPort Female 1 x 3.5mm Audio Jack Female (Green) 1 x 3.5mm Audio Jack Female (Pink)
Computer Ports	2 x USB Type A Male 2 x DisplayPort Male 2 x 3.5mm Audio Plug Male (Green) 2 x 3.5mm Audio Plug Male (Pink)
<b>LEDs</b>	
KVM	2 (White)
<b>Cable Length</b>	
KVM	2 x 1.2 m
Remote Port Selector	1.8 m
<b>Emulation</b>	
Keyboard / Mouse	USB
<b>Video</b>	2560 x 1600 @ 60 Hz
<b>Power Consumption</b>	DC 5V, 6.5 W
<b>Environmental</b>	
Operating Temperature	0° to 50° C
Storage Temperature	-20° to 60° C
Humidity	0 - 80% RH, Non-condensing
<b>Physical Properties</b>	
Housing	Plastic
Weight	0.35 kg
Dimensions (L x W x H)	8.34 x 8.42 x 3.04 cm

### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com

Publish Date: 05/2017 V1.0



© Copyright 2017 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.