




Anwendungen / Application

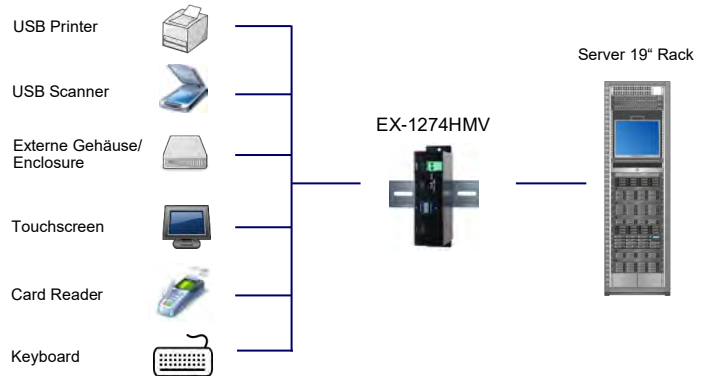

USB 3.1 (Gen2) Metall HUB mit 4 Ports 2 x USB-C und 2 x USB-A Anschluss

Beschreibung

Der EX-1274HMV ist ein USB 3.1 (Gen2) Metall HUB und entspricht den Spezifikationen des Universal Serial Bus (USB) Revision 3.1 (Gen2) und arbeitet mit einer Datengeschwindigkeit bis 10Gbps. Er bietet einen USB-C Upstream Port sowie 4 Downstream Ports mit zwei USB-C sowie zwei USB-A Anschlüsse zum verschrauben. Mit dem eingebauten RISC USB Controller unterstützt der EX-1274HMV einen gleichzeitigen Betrieb von Endgeräten mit den verschiedenen Geschwindigkeiten SuperSpeed Plus(SS+), SuperSpeed (SS), High-Speed (HS), Full-Speed (FS) und Low-Speed (LS) Er kann in Automatisierung- und Büroanwendungen verwendet werden.

Merkmale

- USB 3.1 (Gen2) Metall HUB mit zwei USB-C und zwei USB-A Anschlüssen
- Unterstützt 2.1A USB Bus Power für jeden USB Ausgang
- Unterstützt die schnelle USB Batterie Aufladung: CDP und DCP Mode
- Unterstützt alle USB 1.1 bis 3.1(Gen2) kompatiblen Peripheriegeräte
- Vollausgestattete USB-C Port mit einer zweiseitigen Stecker und Kabel Ausrichtung
- Stromversorgung von +7V bis +48V DC über Terminal Block
- Unterstützt automatisch Bus- oder Self Power
- Metall-Gehäuse für Wand- oder Rack Montage inkl. Din-Rail-Kit
- Status LED Anzeige für jeden Port

Spezifikationen

• Chip-Set:	VIA VL820-Q2
• Datentransfer-Rate:	120Mbps bis 10Gbps
• Anschlüsse:	1 x C-Buchsen Upstream 2 x A-Buchsen Downstream 2 x C-Buchse Downstream 1 x +7V bis +24V DC-Jack Anschluss 1 x +7V bis +24V Terminal Block Anschluss
• Hardwaresysteme:	USB 2.0, 3.0 oder 3.1(Gen2)
• Treiber:	Benötigt keine Treiber (Standard HUB)
• Betriebssysteme:	Win98SE/2000/XP/Vista/7/8.x/10 (32&64-Bit)/ CE/Server(200x & 2012 R2), Linux, Mac OS 10.x
• Betriebstemperatur :	-0°C bis +55°C Celsius
• Lagertemperatur:	-20°C bis +75°C Celsius
• Rel. Luftfeuchtigkeit:	5% bis 95%
• Stromversorgung:	+7V bis +48Volt
• Abmessung:	132.60 x 64.95 x 35.90 mm
• Gewicht:	500 g
• Lieferumfang:	EX-1274HMV, USB C-zu-C Kabel, Din-Rail-Kit, Handbuch



USB 3.1 (Gen2) Metal HUB with 4 ports 2 x USB-C and 2 x USB-A connectors

Description

The EX-1274HMV is a USB 3.0/3.1(Gen2) metal hub support that complies with the Universal Serial Bus (USB) specification Revision 3.1(Gen2) and works up to 10Gbps. There provides 1 USB-C PD-Source capable upstream port and 4 downstream facing ports with 2 USB-C and 2 USB-A connectors screw lock. With the RISC-like USB controller, it supports simultaneous operation of any combination of SuperSpeed Plus (SS+), SuperSpeed (SS), High-Speed(HS), Full-Speed(FS) and Low-Speed(LS) device. The EX-1274HMV can be used for automation- and office applications.

Features

- USB 3.1(Gen2) Metal HUB with two USB-C and two USB-A connectors
- Support 2.1A USB Bus Power for each USB port
- Support Fast USB Battery Charging: CDP and DCP modes
- Support all USB 1.1 up to 3.1(Gen2) compatible devices
- Full-Featured USB-C Port Enables Reversible Plug Orientation and Cable Direction
- Power from +7V up to +48V DC over terminal block
- Support automatically Bus- or Self Power
- Metal housing for wall- or rack mounting incl. Din-Rail-Kit
- Built-in port status indicator LED for each port

Specification

• Chip-Set:	VIA VL820-Q2
• Data transfer rate:	120Mbps to 10Gbps
• Connectors:	1 x C-female Upstream 2 x A-female Downstream 2 x C-female Downstream 1 x +7V to +24V DC-Jack connector 1 x +7V to +24V DC Terminal Block connector
• Hardware system:	USB 2.0, 3.0 or 3.1(Gen2)
• Driver:	No driver necessary (Standard HUB)
• Operating systems:	Win98SE/2000/XP/Vista/7/8.x/10 (32&64-Bit)/ CE/Server(200x & 2012 R2), Linux, Mac OS 10.x
• Operating Temperature :	32°F up to 131°F Fahrenheit
• Storage Temperature:	-20°F up to 167°F Fahrenheit
• Rel. Humidity:	5% to 95%
• Current Supply:	+7V up to 48Volt
• Size:	132.60 x 64.95 x 35.90 mm
• Weight:	500 g
• Packaging contents:	EX-1274HMV, USB C-to-C cable, Din-Rail Kit, Manual

System / OS


Geprüft / Approved

Verpackung / Packaging



EX-1274HMV

Masse / Dimension

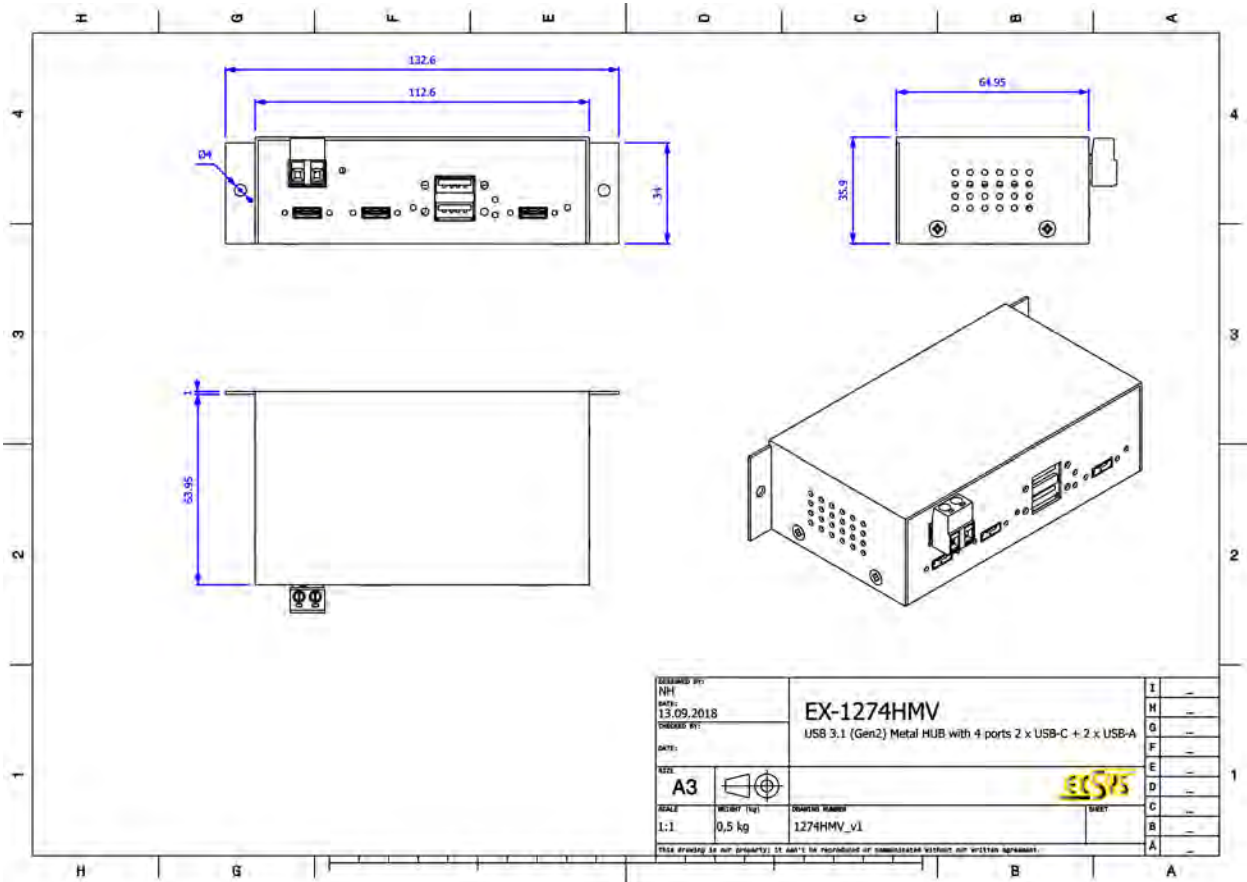

DESIGNED BY: NH		EX-1274HMV	I	-
DATE: 13.09.2018			H	-
CHECKED BY:		USB 3.1 (Gen2) Metal HUB with 4 ports 2 x USB-C + 2 x USB-A	G	-
DATE:			F	-
SIZE:			E	-
A3			D	-
SCALE:	WEIGHT (kg):	DESIGN NUMBER:	C	-
1:1	0,5 kg	1274HMV_v1	B	-
THIS DRAWING IS OUR PROPERTY; IT CAN'T BE REPRODUCED OR COMMUNICATED WITHOUT OUR WRITTEN AGREEMENT.			A	-