




Datenblatt - Fiche technique - Data sheet

**21.15.1387**

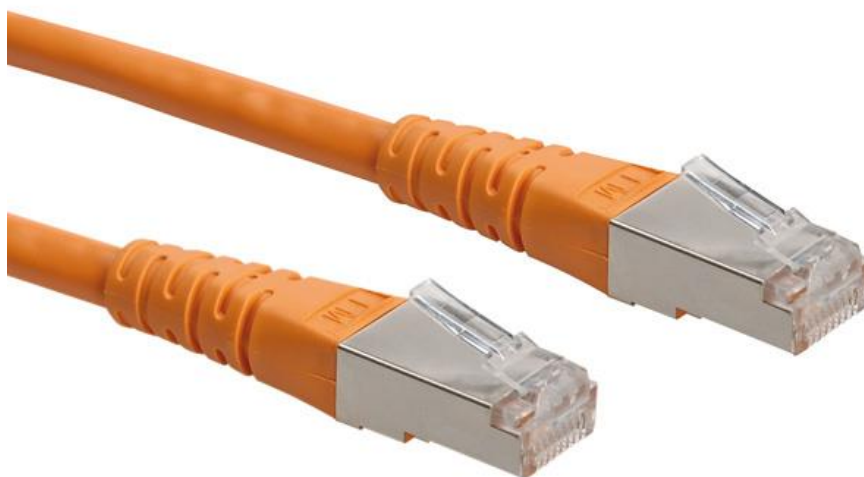

ROLINE S/FTP-(PiMF-)Patchkabel Kat.6, orange, 10m


Cordon ROLINE Cat.6 S/FTP (PiMF) orange, 10,0m

ROLINE S/FTP (PiMF) Patch Cord, Cat.6, orange, 10 m


Total length (optional)



A

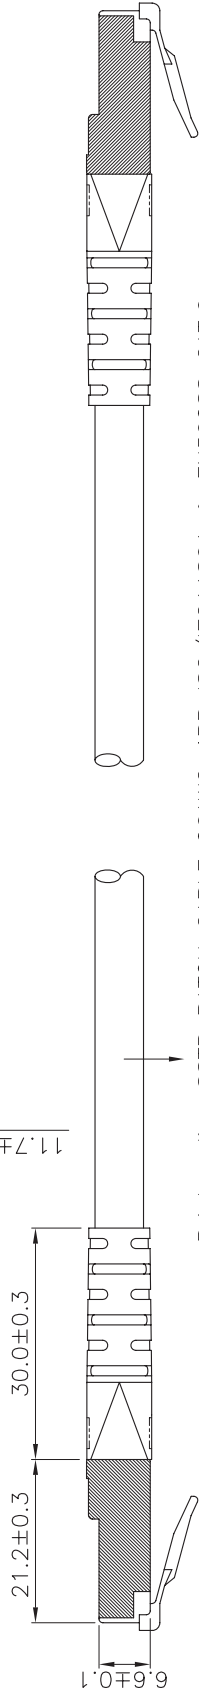

B



C

Remark : SCAEAXX017X XXX X E1201

(1) (2) (3) (4)

(1) XX : Jacket Color

- 01=Black(RAL9011), 02=Gray(RAL7035), 03=Red(RAL3031)
- 05=White(RAL9010), 06=Yellow(RAL1021), 07=Blue(RAL5015)
- 08=Green(RAL6029), 09=Orange(RAL2003), 10=Purple(RAL4005)
- 11=Pink(RAL4003)

(2) X : Wiring

1=T568A, 2=T568B, 3=T568A & T568B combination

(3) XXX : Length

(4) Length Unit : 1=cm, 2=meter, 3=feet.

- (3)(4) : 0301=0.3meter(30cm) 0501=0.5meter(50cm), 0012=1meter, 0102=10meter 0033=3feet, 0103=10feet

Remark#

|            |      |        |            |      |       |
|------------|------|--------|------------|------|-------|
| 21.15.0823 | 1.5m | grey   | 21.15.1346 | 2.0m | white |
| 21.15.0824 | 1.5m | red    | 21.15.1356 | 3.0m | white |
| 21.15.0825 | 1.5m | yellow | 21.15.1366 | 5.0m | white |
| 21.15.0826 | 1.5m | green  | 21.15.1376 | 7.0m | white |
| 21.15.0827 | 1.5m | blue   | 21.15.1386 | 10m  | white |
| 21.15.0828 | 1.5m | black  | 21.15.1396 | 15m  | white |
| 21.15.0829 | 1.5m | white  | 21.15.1406 | 20m  | white |
| 21.15.1316 | 0.3m | white  |            |      |       |
| 21.15.1326 | 0.5m | white  |            |      |       |
| 21.15.1336 | 1.0m | white  |            |      |       |

Specification :

Material :

1. RJ45 Plug : (JE P/N : P028850)
- 1-1. Housing : Polycarbonate, UL 94V-2, Transparent color.
- 1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
- 1-3. Contact finished : Min. 50 micro-inch Gold plated on surface contact area.
- 1-4. Shield : Bronze with Nickel plated.
2. Molding : PVC.
3. Cable :
  - 3-1. Jacket : PVC.
  - 3-2. Conductor : 26 AWG stranded copper.
  - 3-3. Isolation : PE.
  - 3-4. Shield : Aluminum Foil Shielded for Each Pair, Tin Copper Braid.
4. Cable structure : S/FTP, 4 twisted pair.

D

GENERAL TOLERANCE OF DIMENSIONS  
X.XXX ±0.005  
X.XX ±0.05  
X.X ±0.1

|          |                        |                      |
|----------|------------------------|----------------------|
| DRAWING  | 10.JAN.2011            | Abby                 |
| CHECK    | 10.JAN.2011            | Maer                 |
| APPROVAL | 10.JAN.2011            | YTY                  |
| SCALE    | 1/1 (A4)               | UNIT mm              |
|          | DATE                   | NAME                 |
|          | DRAWING NO.            | SCAEAXX017XXXXXE1201 |
|          | DRAWING CLASSIFICATION | S                    |
|          | ITEM NO.:              | SCAEAXX017XXXXXE1201 |
|          | DES.:                  | C6 S/FTP Patch Cord  |

**Rotronic Co.,Ltd.**



1 OF 1 SHEET