



Datenblatt - Fiche technique - Data sheet

21.15.1596




ROLINE UTP-Patchkabel Kat.6, weiss, 15,0 m



Cordon ROLINE Cat.6 UTP, blanc, 15,0 m

ROLINE UTP Patch Cord, Cat.6, white, 15.0 m

Total length (optional)

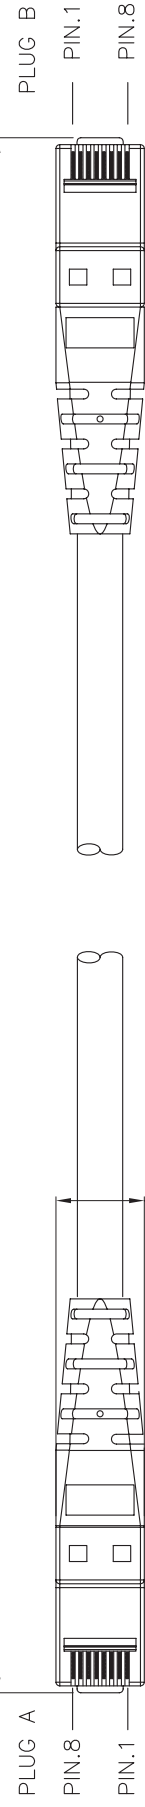

6.6±0.1
21.2±0.3
30.0±0.3
11.7±0.3

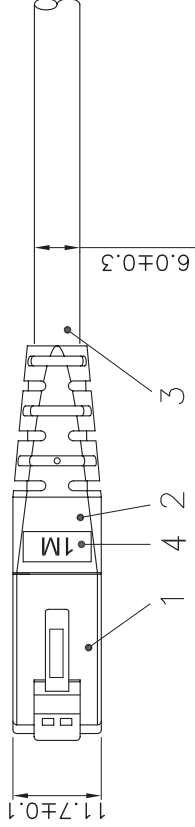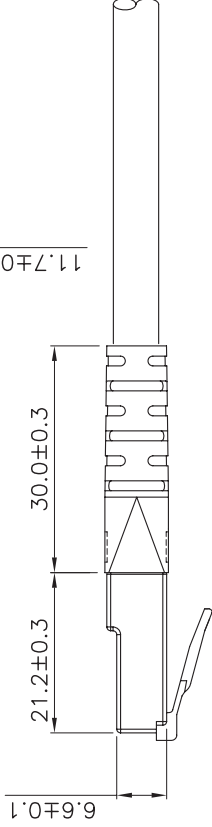

Remark : SCABAXX013X XXX XE1201
(1) (2) (3) (4)

- (1) XX : Jacket Color
01=Black(RAL9011), 02=Gray(RAL7035), 03=Red(RAL3031)
05=White(RAL9010), 06=Yellow(RAL1021), 07=Blue(RAL5015)
08=Green(RAL6029), 09=Orange(RAL2003), 10=Purple(RAL4005)
11=Pink(RAL4003)
- (2) X : Wiring
1=T568A, 2=T568B, 3=T568A & T568B combination
- (3) XXX : Length
- (4) Length Unit : 1=cm, 2=meter, 3=feet.
(3)(4) : 0501=0.5meter(50cm), 0012=1meter, 0102=10meter
0033=3feet, 0103=10feet

Specification :

Material :

- RJ45 Plug : (P/N : PU8850)
 - Housing : Polycarbonate, UL 94V-2, Transparent color.
 - Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - Contact finished : Min. 50 micro-inch Gold plated.
- Narrow PVC Molded.
- Cable : UTP UnShielded and Twisted,
 - 4 pair Stranded wire UL material approved.
 - 24 AWG conductor and PVC jacket.
- length mark(latch side) : 0.3M,0.5M,0.75M,1M,1.5M,2M,3M,5M,7M,7.5M,10M,15M,20M,25M,30M.
- Print : roline UTP PATCH CABLE 24AWG 4PR EIA/TIA-568B.2-1
CAT.6 XXXXXX-X

GENERAL
TOLERANCE
OR
DIMENSIONS
X.XXX ±0.005
X.XX ±0.05
X.X ±0.1

DRAWING	17.MAR.2009	Connie
CHECK	17.MAR.2009	KLi
APPROVAL	17.MAR.2009	Yty
SCALE	1/1 (A4)	UNIT mm
DATE	NAME	ITEM NO.: 21.15.XXXX
DRAWING NO. 21.15.XXXX(SA1)	DES.: C6 UTP Patch Cord	
DRAWING CLASSIFICATION	SHEET 1 OF 1	A1

rotronic