1.25 Gb/s SR SFP TX TRANSCEIVER

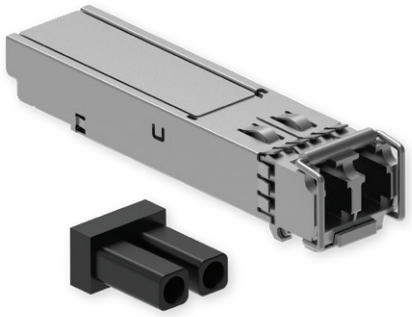

TECHNICAL DATA

GENERAL

DS-SFP112X-ECE0_1.25G SR SFP TX-A1

Connector	Duplex LC
Supported media	Multi-mode fiber
Data rate	1.25 Gb/s
Max. power consumption	< 1 W
Cable distance	Up to 550 m reach over 50 /125 µm MMF
Operating humidity	5 to 85 %
TX wavelength	850 nm
Temperature range	-40°C ~ +85°C
Case	Fully metallic enclosure for low EMI
RoHS	✓
REACH	✓

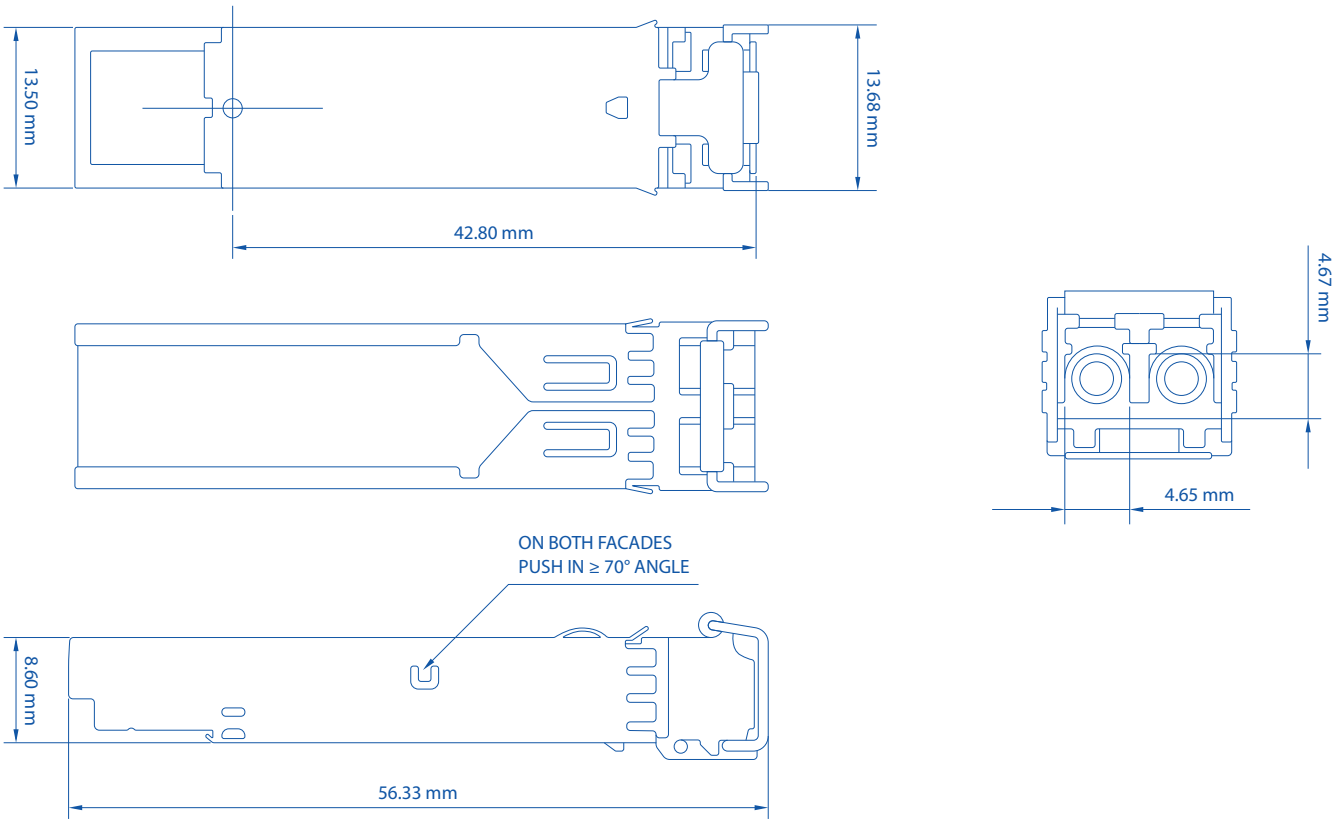

Copyright © 2025, UAB TELTONIKA NETWORKS. Specifications and information given in this document are subject to change by UAB TELTONIKA NETWORKS without prior notice.