

NOTES:

1. MATERIAL

- 1.1 CABLE (3+9) : [(7/0.12BC+FPE+7/0.12CCS+AM)*3]
+ (7/0.12CCS+PVC)*9+AM+7/0.12CCS+64/0.12ALM+BLACK PVC JACKET.
OD: 6.0 ± 0.2MM .

CABLE PRINTING: " VW-1 80°C 30V LOW VOLTAGE COMPUTER CABLE"

- 1.2 HDB15 TYPE MALE: SOLDER TYPE, EMPTY 9 PIN,
GOLD PLATED CONTACTS AND NICKEL PLATED SHELL, 678PIN SHORT CIRCUIT.


- 1.3 HOOD MOLDED BLACK PVC.

- 1.4 THUMB SCREW TO BE MOLDED BLACK PVC.

2. TESTING: 100% SHORT AND OPEN TEST.

3. ALL MATERIALS SHOULD BE ROHS ENVIROMANTAL COMPLIANT.

P/N CHART	
MODEL	LENGTH
S3602	2000 ± 50MM
S3605	10000 ± 150MM
S3603	3000 ± 70MM
S3604	6000 ± 150MM

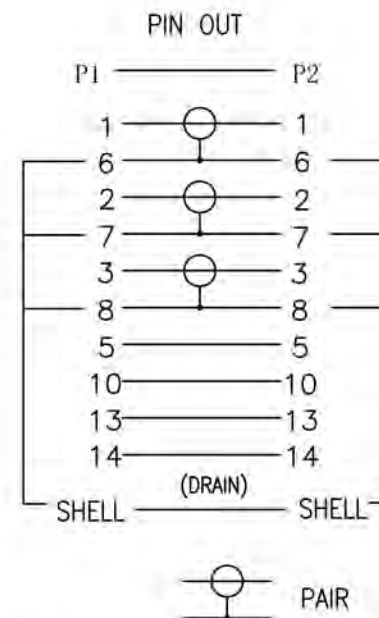

DIMENSIONAL TOLERANCES:		SIZE: FREE	CUSTOMER:		SECOMP		ENG.: SUMIN
X. ±	.X ±	.XX ±	UNIT: mm		PRODUCT NO.: VIEW P/N CHART	CUSTOMER NO.: VIEW P/N CHART	CHECKED:
X' ±3'	X' ±1'	REV.: 00	PAGE: 1/1		DRAWING NO.: HF2869	PRODUCT DESCRIPTION: HDB15M/HDB15M NICKEL-PLATED	APPROVED:

00	NEW ISSUE	2021-03-03
REV.	MODIFY DESCRIPTION	DATE