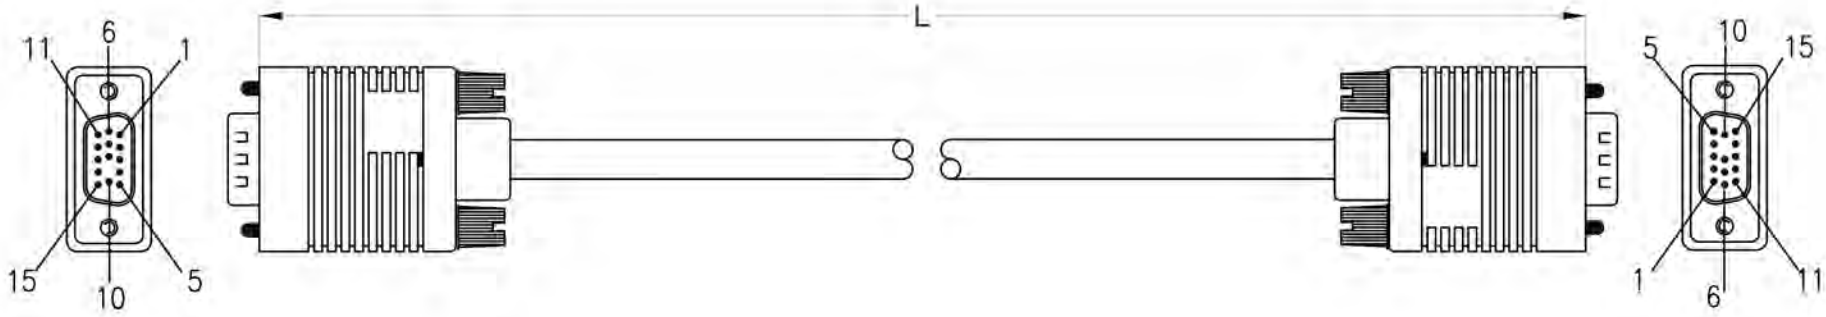

NOTES:

1. MATERIAL
   - 1.1 CABLE(3+9):[(7/0.12BC+FPE+7/0.12CCS+AM)*3]
     +(7/0.12CCS+PVC)*9+AM+7/0.12CCS+64/0.12ALM+BLACK PVC JACKET.
     OD:6.0±0.2MM .
     CABLE PRINTING: " VW-1 80℃ 30V LOW VOLTAGE COMPUTER CABLE"
   - 1.2 HDB15 TYPE MALE: SOLDER TYPE, EMPTY 9 PIN,
     GOLD PLATED CONTACTS AND NICKEL PLATED SHELL, 678PIN SHORT CIRCUIT.
   - 1.3 HOOD MOLDED BLACK PVC.
   - 1.4 THUMB SCREW TO BE MOLDED BLACK PVC.
2. TESTING:100% SHORT AND OPEN TEST.
3. ALL MATERIALS SHOULD BE ROHS ENVIROMANTAL COMPLIANT.

P/N CHART	
MODEL	LENGTH
S3602	2000±50MM
S3605	10000±150MM
S3603	3000±70MM
S3604	6000±150MM

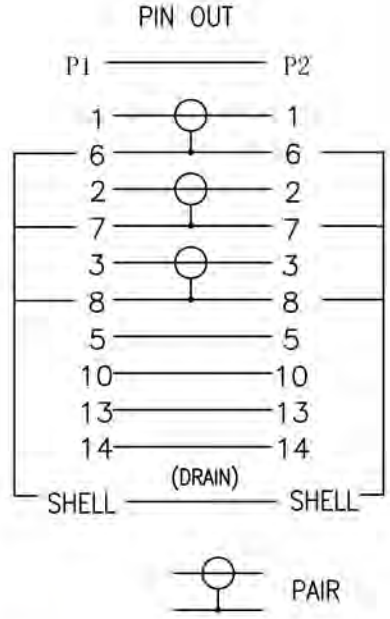

			DIMENSIONAL TOLERANCES: X. ± .X ± .XX ±	SIZE: FREE	CUSTOMER:	SECOMP	ENG.: SUMIN
				UNIT: mm		PRODUCT NO.: VIEW P/N CHART	CUSTOMER NO.: VIEW P/N CHART	CHECKED:
00	NEW ISSUE	2021-03-03	X° ±3° .X° ±1°	REV.: 00	PAGE: 1/1	DRAWING NO.: HF2869	PRODUCT DESCRIPTION: HDB15M/HDB15M NICKEL-PLATED	APPROVED:
REV.	MODIFY DESCRIPTION	DATE						