

NOTES:

1. MATERIAL

1.1 CABLE(3+9): [(7/0.12BC+FPE+7/0.12CCS+AM)*3]
 +(7/0.12CCS+PVC)*9+AM+7/0.12CCS+64/0.12ALM+BLACK PVC JACKET
 OD:6.0±0.2MM.

CABLE PRINTING:" VW-1 80°C 30V LOW VOLTAGE COMPUTER CABLE"

1.2 HDB15 TYPE MALE: SOLDER TYPE, EMPTY 9 PIN,
 GOLD PLATED CONTACTS AND NICKEL PLATED SHELL, 678PIN SHORT CIRCUIT.

1.3 HOOD MOLDED BLACK PVC.

1.4 THUMB SCREW TO BE MOLDED BLACK PVC.


1.5 FERRITE CORE (∅12*7.3*15MM) TO BE

2. TESTING:100% SHORT AND OPEN TEST.

3. PACKING:1PC/PE BAG+LABEL.

4. ALL MATERIALS SHOULD BE ROHS ENVIROMANTAL COMPLIANT.

P/N CHART	
MODEL	LENGTH
S3616	3000±70MM
S3618	10000±150MM
S3615	2000±50MM
S3617	6000±150MM

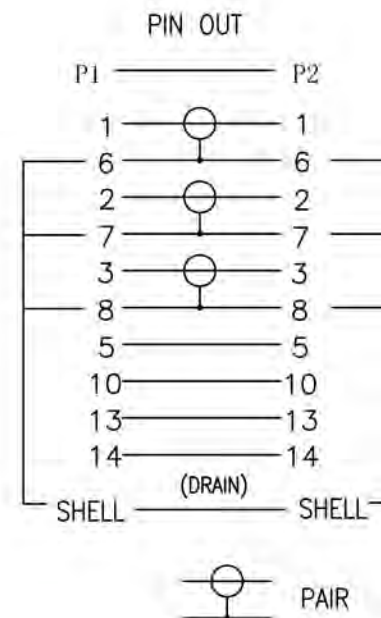

DIMENSIONAL TOLERANCES: X. ± .X ± .XX ±		SIZE: FREE UNIT: mm	CUSTOMER: 	SECOMP		ENG.: SUMIN
						CHECKED:
00	NEW ISSUE	2021-03-03	REV.: 00	PRODUCT NO.:	CUSTOMER NO.:	APPROVED:
REV.	MODIFY DESCRIPTION	DATE		DRAWING NO.: HF2870	PRODUCT DESCRIPTION: HDB15M/HDB15M NICKEL-PLATED	